

# Core Photography



## Core Photography

### Camera Remote

Compact remote switch with a cable replicating all functions of the camera's shutter release button.

#### Compatible with:

- **EOS:** 30V, 33V, 300D, 300V, 300X, 350D, 400D, 450D, 500D, 550D, 1000D, 3000N, 60D, 600D, 1100D, 650D, 70D, 700D, Elan II/IIe, Elan 7/7E, Rebel Ti /2000/G/ GII/X/XS, IX/IX Lite, SX50 HS, T1i, T2, T2i, T3, T3i, T4i, T5, T5i
- **Powershot:** G10, G11, G12, G15, G16, G1X, SX50

	SKU	DESCRIPTION
A	1144-00206	Non-Genuine Remote
B	1144-00113	Canon Remote



### Circular Polarising Filter

Light rays which are reflected by any surface become polarised and polarising filters are used to select which light rays enter your camera lens. The Circular Polarising filter allows you to remove unwanted reflections from non-metallic surfaces such as water, glass etc. It also will enable colors to become more saturated and appear clearer, with better contrast.

SKU	SIZE	SUITS
1144-00115	58mm	18-55mm Lens
1144-00217	67mm	10-18mm Lens
1144-00207	72mm	17-70mm Lens



### SD Memory Card

There's plenty of room to store tons of pictures and full HD videos.

- Compatible with digital cameras and GPS's (SDHC/SDXC and SDHC-I/SDXC-I devices)
- Resistant to water, temperature fluctuations.
- Save time with ultra-fast speeds.

SKU	SIZE
1144-00114-16GB	16GB
1144-00114-32GB	32GB
1144-00114-64GB	64GB
1144-00114-128GB	128GB



## Core Photography

### Canon EOS 200D MKII

An ultra-compact DSLR that features a 24MP APS-C-sized CMOS sensor, DIGIC 8 processor and Dual Pixel autofocus system.

The main differences between the 200D MKII and 200D is the addition of Eye AF during live view, an even smaller and lighter body, and 4K video.

While its Dual Pixel AF system promises very good live view and video performance, the through the viewfinder AF system is aging.

This camera has a fully articulating 3" touchscreen display with an easy-to-use interface, 1080/60p video capture and a burst rate of up to 5 fps. The 200D MKII can capture 4K video but with a substantial crop and no Dual Pixel AF. Connectivity options include Wi-Fi (with NFC) and Bluetooth.



SKU	DESCRIPTION
1144-00233	Body only
1144-00205	Camera lens, 17-70mm f/2.8-4
1144-00174	Camera lens, 10-18mm f/4.5-5.6 (Used for Double Camera Frame)

#### Camera Kit

SKU	DESCRIPTION
1144-00235	Body and EF-S 18-55mm f/4-5.6 IS STM Lens



For more detailed information on this product, check the official Canon website.

### Canon EOS 1500D with 18-55mm Lens

A budget-friendly DSLR with an 24MP APS-C-size sensor. It uses Canon's DIGIC 4+ image processor which offers an ISO range of 100-6400, expandable to 12800, as well as 3p fps burst shooting. It features a 9-point AF system with a cross-type sensor at the center.

It also features with a 3-inch, 920,000-dot LCD and, of course, an optical viewfinder. It also offers a host of scene modes, including a Scene Intelligent Auto mode, plus numerous creative filters. Full HD can be captured at 30p or 24p. The 1500D also has Wi-Fi with NFC for easy sharing via Canon's Camera Connect app.

SKU	DESCRIPTION
1144-00218	Kit
1144-00174	Camera lens, 10-18mm f/4.5-5.6 (Used for Double Camera Frame)



## Core Photography

### HP mx330 Class 10 U3 microSD Flash Memory

The HP mx330 Class 10 U3 microSD Flash Memory Cards are the perfect solution to expand on-board memory of mobile devices. The Class 10, U3 rating, with read speeds of up to 100MB/s guarantees that you can quickly store and share content between devices. U3 technology is ideal for HD photography and 4K Ultra HD video recording, allowing you to capture high quality content on your action camera, drone, or other mobile device.



SKU	SIZE
1144-00311-64GB	64GB
1144-00311-128GB	128GB

- Compatible with SDHC and SDXC enabled host devices Smartphones, tablets, action cameras, drones, and computers.
- Perfect for smartphones, tablets, action cameras, drones.
- Class 10, U3 rated, ideal for HD photography and 4K.
- Ultra HD video recording.
- Read speeds of up to 100MB/s
- Expand on-board memory of mobile devices.
- Share and store high resolution digital content with included SD adapter.
- Magnet Proof, Shock Proof, Temperature Proof, Waterproof.

### Promster High Speed Data Cable USB

The data download cable provides an easy transfer of your photos from camera to computer. Compatible with Canon EOS 200D MKII Camera



These fully-rated universal serial bus cables provide transfer rates up to 480Mbps, depending on the USB version, and easily attach to any mini-USB device. Mini USB cables are designed to connect from your USB port on Hub, PC, or Mac to your USB device, including cellular phones and PDAs. Foil and braid shielding reduces EMI/RFI interference, and twisted-pair construction helps reduce crosstalk thus ensuring high-speed, error-free data transfer. Meets all the UL requirements for communication cabling, and is compatible with USB 1.0, 1.1, and 2.0.

### Sigma 17-70mm f/2.8-4 DC Macro OS Contemporary for Canon

- Lens construction: 16 elements in 14 groups
- Minimum aperture: f22
- Filter size: φ72mm
- Minimum focusing distance: 22cm

SKU	SIZE
1144-00205	17-70mm f/2.8-4



SKU	DESCRIPTION
A 1144-00285	Compatible with 1500D Camera
B 1144-00253	Compatible with 200D Camera



This USB 2.0 cable combines style, quality, performance, and value while giving you the ultimate in cable technology. Constructed with UL-tested and certified cable, these cables meet the rigid standards of everyday use. The USB 2.0 cable is double-shielded with a dual foil and braid. A metal shield surrounds the connector, while a solder-to-connector shell and cable braid create an end-to-end shielding solution for a noise-free connection. This cable is ideal for connecting many cameras, cell phones, and other current devices (Kindle, etc.) to the USB port on your computer.

### Canon EF-S 10-18mm f/4.5-5.6 IS STM Lens

- Lens construction: 14 elements in 11 groups
- Minimum aperture: f22-29
- Filter size: φ67mm
- Minimum focusing distance: 22cm

SKU	SIZE
1144-00174	10-18mm f/4.5-5.6

Used for Double Camera Frame



## Core Photography

	CANON 200D MKII	CANON 1500D
Max resolution	6000 x 4000	6000 x 4000
Image ratio w:h	1:1, 4:3, 3:2, 16:9	1:1, 4:3, 3:2, 16:9
Effective pixels	24 megapixels	24 megapixels
Sensor photo detectors	26 megapixels	25 megapixels
Processor	DIGIC 8	Digic 4+
ISO	Auto, 100-25600, expands to 51200	Auto, ISO 100-6400, expandable to 12800
File format	JPEG (Exif v2.3), Raw (14-bit Canon CR2), C-RAW (compressed)	JPEG, RAW (Canon CR2, 14-bit)
Manual focus	✓	X
Number of focus points	3975	9
Articulated LCD	Fully articulated	Fixed
Screen type	TFT LCD, 3", Optical (pentamirror)	TFT LCD, 3", Optical (pentamirror)
Screen dots	1,040,000	920,000
Touch screen	✓	X
Exposure modes	<ul style="list-style-type: none"> <li>Program</li> <li>Shutter priority</li> <li>Aperture priority</li> <li>Manual</li> </ul>	<ul style="list-style-type: none"> <li>Scene Intelligent Auto</li> <li>Program</li> <li>Shutter Priority</li> <li>Aperture Priority</li> <li>Manual</li> </ul>
Scene modes	<ul style="list-style-type: none"> <li>Portrait</li> <li>Smooth skin</li> <li>Group photo</li> <li>Landscape</li> <li>Sports</li> <li>Kids</li> <li>Close-up</li> <li>Food</li> <li>Candlelight</li> <li>Night portrait</li> <li>Handheld night scene</li> <li>HDR backlight control</li> </ul>	<ul style="list-style-type: none"> <li>Landscape</li> <li>Close-up</li> <li>Sports</li> <li>Food</li> <li>Night Portrait</li> </ul>
Flash modes	---	Auto, On, Off, Red-eye
Flash X sync speed	1/200 sec	1/200 sec
Drive modes	<ul style="list-style-type: none"> <li>Single</li> <li>High-speed continuous</li> <li>Silent single</li> <li>Silent continuous</li> <li>Self-timer</li> <li>Continuous shooting after self-timer</li> </ul>	<ul style="list-style-type: none"> <li>Single</li> <li>Continuous</li> <li>Self-timer</li> <li>Continuous w/self-timer</li> </ul>
Continuous drive	5.0 fps	3.0 fps
Metering modes	Multi, Center-weighted, Spot, Partial	Multi, Center-weighted, Partial
Exposure compensation	±5 (at 1/3 EV, 1/2 EV steps)	±5 (at 1/3 EV, 1/2 EV steps)
AE Bracketing	±3 (3 frames at 1/3 EV, 1/2 EV steps)	±2 (3 frames at 1/3 EV, 1/2 EV steps)
WB Bracketing	X	✓
Storage types	SD/SDHC/SDXC (UHS-I compatible)	SD/SDHC/SDXC card
Orientation sensor	✓	✓
Timelapse recording	Yes (videos only)	X
GPS	X	X
USB	USB 2.0 (480 Mbit/sec)	USB 2.0 (480 Mbit/sec)
HDMI	Yes (Mini-HDMI)	Yes (Mini-HDMI)
Microphone port	✓	X
Wireless notes	802.11b/g/n + NFC + Bluetooth	802.11b/g/n with NFC
Remote control	Yes (via wireless remote or smartphone)	Yes (wired or wireless)
Environmentally sealed	X	X
Battery description	LP-E17 lithium-ion battery & charger	Lithium-Ion LP-E10 rechargeable battery and charger
Battery Life (CIPA)	1070	500
Weight (inc. batteries)	449 g (0.99 lb / 15.84 oz)	475 g (1.05 lb / 16.76 oz)
Dimensions	122 x 93 x 70 mm (4.8 x 3.66 x 2.76")	129 x 101 x 78 mm (5.08 x 3.98 x 3.07")

## Core Photography

### Photo Scales

On one side is the Photo Scale, calibrated boldly in centimeters (10) and U.S. inches (4). Includes a GSA seal for fine focus and an evaluation scale for granular material from 1 to 5 millimeters diameter. The reverse side includes the complete GSA Geologic Time Scale. 150 x 55mm.


SKU	SIZE
PHOTOSCALES	150 x 55mm



### Core Tray Header Sheet

Record your drill hole details using photography, our laminated insert allow you to records hole details using white board markers and then just wipe off for the next tray. Use white board markers.

	SKU	DESCRIPTION	SIZE
A	1144-00600	Label Header Sheet	1100 x 250mm
B	1144-00600-CF	Core Flute Header Sheet	1100 x 125mm
	1160-00024	Whiteboard Marker Pack of 6	2mm nib
	1603-00268	Whiteboard Marker Eraser	One Size

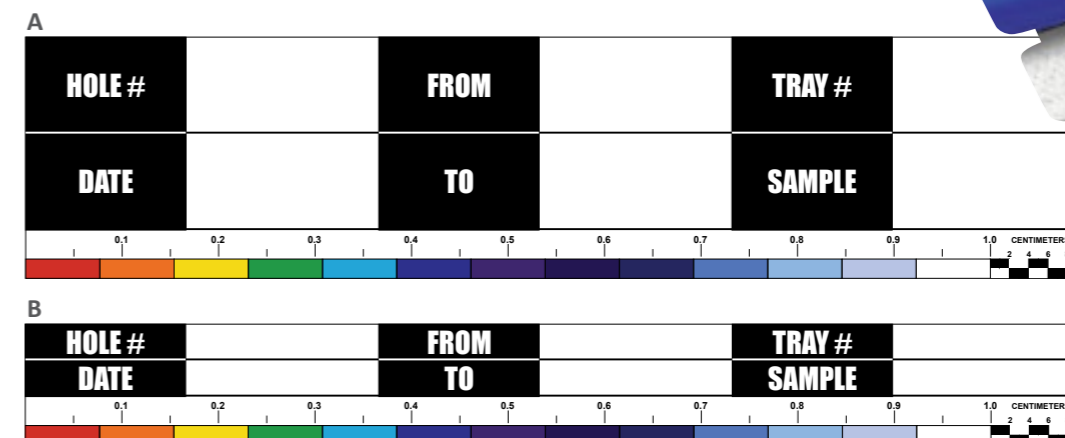

## Core Photography

### Flat Pack Roller Racking Camera Frame & Canvas Cover

We have designed a flat pack camera frame that can be used to take high-resolution images of your core in their trays. These frames also come with a canvas cover with a side and top zip for easy access.

#### 450mm Wide Roller Frames

SKU	DESCRIPTION
1144-90130-450	Camera Frame Trolley Frame 450mm
1144-90136-450-B	Cover 450mm Black
1144-90136-450-W	Cover 450mm White

SKU	DESCRIPTION
1144-90131-450	Camera Frame Fixed 450mm
1144-90136-450-B	Cover 450mm Black
1144-90136-450-W	Cover 450mm White

#### 600mm Wide Roller Frames

SKU	DESCRIPTION
1144-90130-600	Camera Frame Trolley Frame 600mm
1144-90135-600-B	Cover 600mm Black
1144-90135-600-W	Cover 600mm White

SKU	DESCRIPTION
1144-90131-600	Camera Frame Fixed 600mm
1144-90135-600-B	Cover 600mm Black
1144-90135-600-W	Cover 600mm White

*Please note: Camera Frames will require Camera Mount Flat Head Screw to affix camera. Customer is to specify which colour cover they would like in their order for their respective frame.*



Roller racking camera frame with wheels



Roller racking camera frame fixed



Black and white camera frame cover options

## Core Photography

### Flat Pack Floor Camera Frame & Canvas Cover

We have designed a flat pack camera frame that can be used to take high-resolution images of your core in their trays. These frames also come with a canvas cover with a side and top zip for easy access.

SKU	DESCRIPTION
1144-90134-S	Camera Frame Universal Single Tray
1144-90134-S-B	Cover 475mm Single Tray Black
1144-90134-S-W	Cover 475mm Single Tray White

SKU	DESCRIPTION
1144-90134-I	Camera Frame Universal Info Slot Tray
1144-90134-I-B	Cover 725mm Info Slot/Tray Black
1144-90134-I-W	Cover 725mm Info Slot/Tray White

SKU	DESCRIPTION
1144-90134-D	Camera Frame Universal Double Tray
1144-90134-D-B	Cover 950mm Double Tray Black
1144-90134-D-W	Cover 950mm Double Tray White

*Please note: Camera Frames will require Camera Mount Flat Head Screw to affix camera. Customer is to specify which colour cover they would like in their order for their respective frame.*



Floor camera frame single



Floor camera frame info slot



Floor camera frame double



Black and white camera frame cover options

## Core Photography

### Laptop Arm with Desk mount

Made of aircraft aluminium. 360° free switch between portrait and landscape orientation. With A/V ports and USB ports. Both clamp and grommet mount included in the box for the desk clamp version.

SKU
1167-00004



### Quick Release Plate Adapter

This adapter clamp gives you the freedom to remove the camera from the head without detaching it from the plate and put it on any other support.

Aluminium Alloy 1/4 inch Quick Shoe Plate Adapter Clamp with 1/4-3/8 inches Screw and Bubble Level. Suitable for Canon, Nikon, Sony and Other DSLR Cameras and Tripod, Monopod and Stabilizer Ball Head.

SKU
1144-00279



### Dual LED Lights for Camera Stand-Power

Dual LED lights for optimum illumination.

- Adjustable angle: 180 Degree

SKU
1144-00232-P



### Camera Mount Flat Head Screw

1/4" metal male thread with flat head screwdriver slot. Shaft is 10mm in length, approx 5.1mm threaded, 5mm unthreaded. Total length including base is 13.1mm. Head diameter is 12mm.

SKU	SIZE
1144-00151	1/4"



## Core Photography

### Battery LED Lights for Camera Stand

- Special LED bulb layout design, giving wider lighting ranger and brighter effect.
- Lightweight, portable and compact.
- Adjustable angle: 180 Degree.
- Sold as each, so you may require two.

	SKU	DESCRIPTION	UOM
A	1144-00251	Battery LED Lights for Camera Stand	Each
B	1144-00232-A	Charger for LED Lights for Camera	Each

Please note: 2 LED lights are required for optimum illumination.



### Charger for LED Lights for Camera

**2 Fully Compatible Spare Batteries:** 2 replacement batteries with a larger capacity of 2600mAh and a dual slot charger to ensure your camera is always ready to shoot.

**3 Ways to Charge:** Power using a wall charger, car charger, or even a portable charger; The Micro-USB 5V / 2.1A max input recharges 2 batteries fully in just 6 hours. **Note:** The wall charger, car charger and portable charger are not included in the package.



### Roller Racking Photography Guide/Centraliser

These handy attachments connect to the edge of your roller racking to ensure your core tray lines up perfectly with your camera; ensuring consistent photos and less time spent adjusting.

Simply push your tray along and the attachment will guide the tray into the correct position meaning your photos will be much more streamlined.

SKU	SIZE
1504-96015	600mm





***Perth Main Warehouse***

66 Truganina Rd, Malaga,  
Western Australia 6090  
+61 (0) 8 9209 8500  
perth@westernex.com.au

***Kalgoorlie Warehouse***

18 Kinclaven Way, Broadwood,  
Kalgoorlie, Western Australia 6430  
+61 (0) 8 9091 1152  
kalgoorlie@westernex.com.au

***Brisbane Warehouse***

14 Hasp St, Seventeen Mile Rocks,  
Queensland 4073  
+61 (0) 7 3376 2422  
brisbane@westernex.com.au

***Mt Isa Warehouse***

13 Ryan Rd, (Entry off Davis Rd)  
Mt Isa, Queensland 4825  
+61 (0)7 4743 2122  
mtisa@westernex.com.au

***Orange Warehouse***

72 Astill Drive, Orange,  
NSW, 2800  
+61 (0) 7 3376 2422  
brisbane@westernex.com.au

